

# FC400-CCL-FA FC400-DAC-FA FC400-EIP-FA FC400-ECT-FA FC400-232-FA



## DIN RAIL MOUNT DIGITAL INDICATOR


**Applicable from fast response measurement to multi-weighing with high accuracy!**

- FC400-CCL-FA** A measurement system can be configured easily using CC-Link network.
- FC400-DAC-FA** Either voltage or current output, corresponding to the indicated value, is available.
- FC400-EIP-FA** A measurement system can be configured easily using EtherNet/IP network.
- FC400-ECT-FA** A measurement system can be configured easily using EtherCAT network.
- FC400-232-FA** Measured data and results can be collected using RS-232C network.



### High sampling rate & resolution

High-Speed A/D conversion and powerful digital processing capability of 2400 times/sec.  
High display resolution of 1/100000 (max).



Measurement can be performed quickly and precisely due to high speed A/D conversion.


### Application software for USB interface

With communication through USB interface, logging, graph display, setting parameters, and calibration can be done.



### High performance filter & auto filter adjustment

With combination of low pass filter (0.1 to 600 Hz) which corresponds to various vibration and moving average filter (OFF, 2 to 999) that is effective for periodic vibration, automatic searching for optimal value with accuracy and stability can be achieved.  
(You can manually adjust settings too)

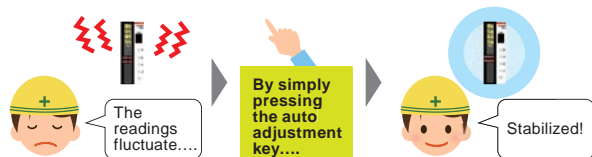




### Compact size

It can be fit into a limited space!  
Light weight & compact body for 35 mm DIN rail mount.



### Various interfaces

- FC400-CCL-FA** Equipped with CC-Link, SI/F, USB interface
- FC400-DAC-FA** Equipped with D/A converter, RS-485, USB interface
- FC400-EIP-FA** Equipped with EtherNet/IP and USB interface
- FC400-ECT-FA** Equipped with EtherCAT and USB interface
- FC400-232-FA** Equipped with RS-232C, SI/F, USB interface

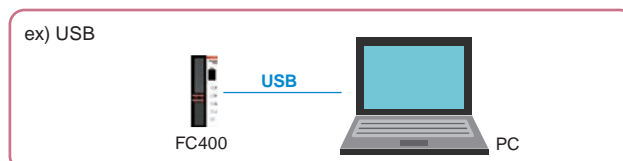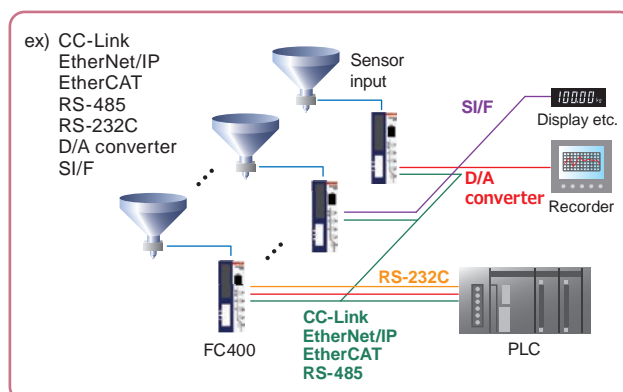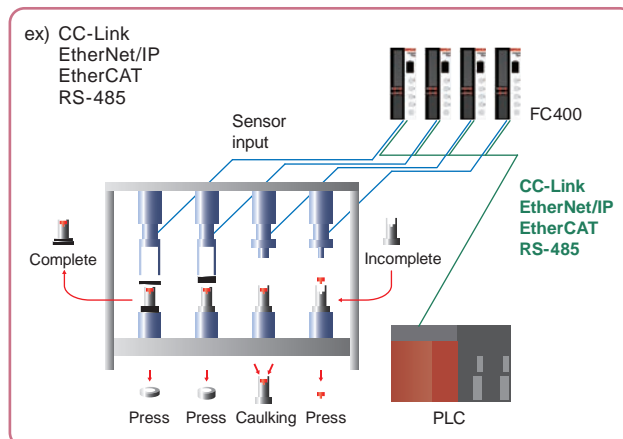

### Digital peak & bottom hold, Hi & Lo function

Quickly detect high speed changes & make OK/NOK judgement

### Equivalent input calibration

Theoretical calibration can be performed easily by registering the capacity and rated output of load cells.

### Input conversion value display

The output signal level of load cell can be displayed in mV/V for monitor purpose.  
Malfunction indicator or faulty sensor can be differentiated easily.

### 6-digit display

24 bit A/D converter enables 6-digit display

## Specifications

Analog	Excitation voltage	DC 5 V±5% Output current: Within 90 mA DC 2.5 V±5% Output current: Within 45 mA (depending on settings) Ratiometric method (Up to 6 350 load cells can be connected in parallel)	
	Signal input range	-3.9 to +3.9 mV/V	
	Zero adjustment range	Automatic adjustment by digital processing -3.0 to +3.0 mV/V	
	Span adjustment range	Automatic adjustment by digital processing 0.01 to 3.8 mV/V	
	Min. input sensitivity	0.15 $\mu$ V/count	
	Accuracy	Non-linearity: Within 0.01% FS Zero drift: 0.0002% FS/°C typ. * When calibrated by 3 mV/V with 5 V of the excitation voltage Gain drift: 1 ppm/°C typ.	
	Filter	Digital low-pass filter: 0.1 to 600 Hz Moving average filter: OFF, 2 to 999 times	
	A/D converter	Speed: 2400 times/sec. Resolution: 24 bit (binary)	
	Display	Display unit	Character height: 8 mm Numerical display by 7-segment green LED
		Display value	Up to 6 digits
Display frequency		Selectable from 1, 3, 6, 13, and 25 times/sec.	
Status display		RUN, SD, RD, ERR (FC400-CCL-FA) MS, NS (FC400-EIP-FA) RUN, ERR (FC400-ECT-FA)	
Hold		Sample, Peak, Bottom, Peak&Bottom, Average	
External signal	Output signal (5)	Selectable/configurable Transistor's open collector output V <sub>ceo</sub> = 30 V, I <sub>c</sub> = 50 mA	
	Input signal (3)	Selectable/configurable Input is ON when shorted to COM terminal by contact (relay switch, etc.) or non contact (transistor, open collector, etc.). * DC 24 V external power supply is required.	
Interface		CC-Link interface (FC400-CCL-FA) D/A converter interface (Voltage and current output) (FC400-DAC-FA) EtherNet/IP interface (FC400-EIP-FA) EtherCAT interface (FC400-ECT-FA) RS-232C interface (Selectable from Modbus-RTU or UNI-Format) (FC400-232-FA) RS-485 interface (Selectable from Modbus-RTU or UNI-Format) (FC400-DAC-FA) SI/F 2-wire type serial interface (FC400-CCL-FA, FC400-232-FA) USB interface	

General specification	Power supply voltage	DC 24 V (±15%)
	Power consumption	3 W typ. (FC400-DAC-FA, FC400-232-FA) 4 W typ. (FC400-CCL-FA, FC400-EIP-FA, FC400-ECT-FA)
	Operating conditions	Operation temperature: -10 to +50°C Storage temperature: -20 to +85°C Humidity: 85% RH or less (non-condensing)
	Dimension	34(W) x 88(H) x 91(D) mm (Not including projections)
	Weight	Approx. 210 g (FC400-CCL-FA, FC400-DAC-FA) Approx. 230 g (FC400-EIP-FA, FC400-ECT-FA) Approx. 220 g (FC400-232-FA)
Attachments	Quick manual.....	2
	Jumper wire.....	2
Optional accessories	Mini driver.....	1
	CC-Link connector (FC400-CCL-FA).....	1
	Various I/O connector (FC400-CCL-FA, FC400-EIP-FA, FC400-ECT-FA)...	2
	(FC400-DAC-FA, FC400-232-FA).....	3
	CA81-USB:miniUSB-computer USB cable 1.8 m	
	CN74: CC-Link connector (Same as the attachment)	
	CN75: CC-Link connector (Y type branch connector)	
	CN76: CC-Link connector (Terminator connector)	
	CN85: 13 p connector for power source/sensor/RS-485 (Same as the attachment)	
	CN86: 3 p connector D/A converter (Common with RS-232C connector) (Same as the attachment)	
CN87: 10 p connector for external I/O (Same as the attachment)		
CE marking certification		EMC directive EN61326-1


\* FC400-ECT-FA is Free Run mode.  
\* Please note that there are possibilities of individual differences in a color tone on display devices such as LEDs, fluorescent display tubes and LCDs due to manufacturing process or production lots.

### Structure of product code


Model	Interface
FC400-CCL-FA	CC-Link, SI/F, USB
FC400-DAC-FA	D/A converter (Voltage and current output), RS-485, USB
FC400-EIP-FA	EtherNet/IP, USB
FC400-ECT-FA	EtherCAT, USB
FC400-232-FA	RS-232C, SI/F, USB

## External dimension


### FC400-CCL-FA

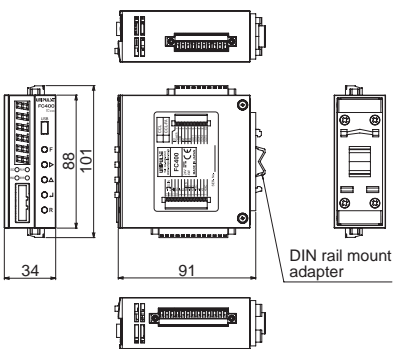


### FC400-DAC-FA

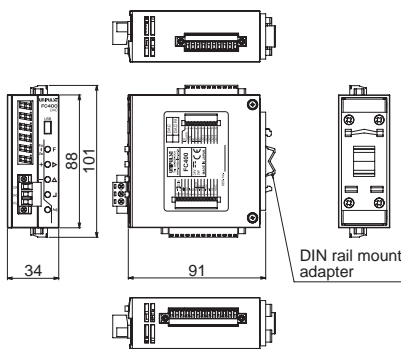


### FC400-EIP-FA

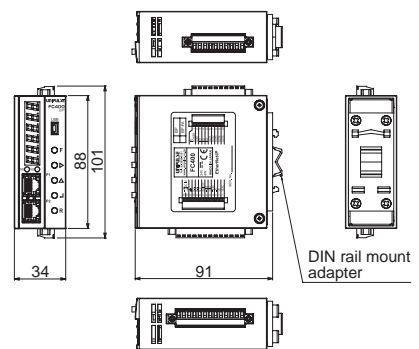

### FC400-ECT-FA

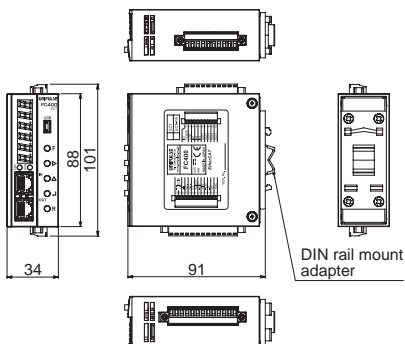

### FC400-232-FA

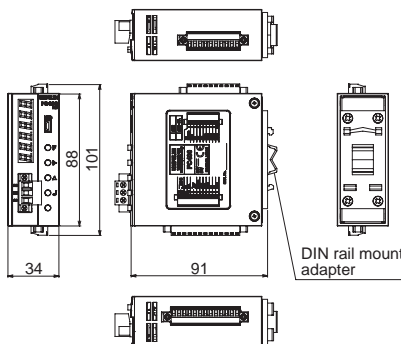

Unit: mm