

# F600AT

GRAPHIC DISPLAY / TOUCH PANEL TYPE  
WEIGHING INDICATOR



\*Only for DC specification




- 3.5 inch color LCD module & touch panel  
Weight is graphically displayed in real time. The color LCD and touch panel are equipped with backlight for improved visibility on guidance messages so that setting can be performed without the instruction manual.
- Memory for 8 types of codes  
Up to 8 kinds of setting values such as final value can be saved, the code selection can be done via external signal.
- Direct PLC connection  
CC-Link and DeviceNet can directly connect to PLC.
- DIN-size  
DIN-size 96×96 for easy installation

### Setting Screen



Easy setting by touch panel

### Waveform display




Real time weight trend display

### Exclusive PC application for setup

With RS-232C interface that allow you to read, write, save and retrieve parameter settings with a PC.

### External dimension

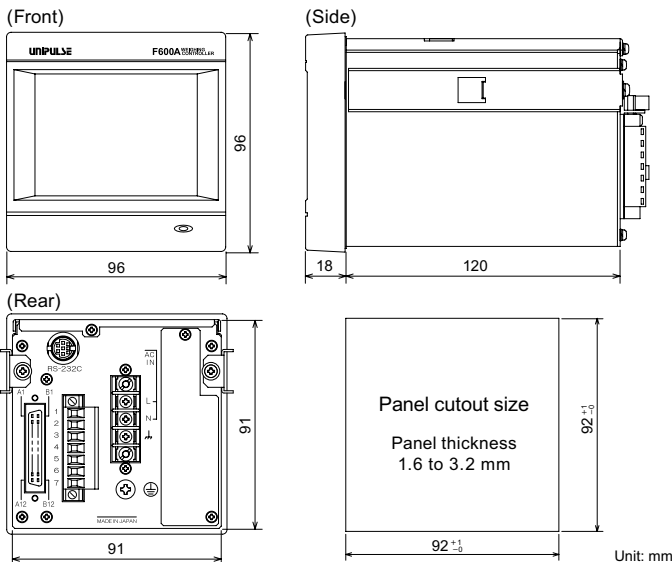


### Specification

Analog	Excitation voltage	DC 10 V±5% Output current: Within 120 mA
	Remote sense type	Up to 4 350 Ω load cells can be connected in parallel.)
	Signal input range	-0.2 to +3.0 mV/V
	Zero adjustment range	-0.2 to +3.0 mV/V Automatic adjustment by digital processing
	Gain adjustment	Automatic adjustment by digital processing
Accuracy	Non-linearity	Within 0.02% FS±1 digit (At 3.0 mV/V input)
	Zero drift	Within 0.25 μV/°C RTI
	Gain drift	Within 25 ppm/°C
Analog filter	Bessel type low-pass filter (-12 dB/oct.)	
A/D converter	Speed: 100 times/sec. Resolution: 24 bit (binary)	
Display	Display	TFT color LCD module
	Display area	71(W) × 53(H) mm 320 × 240 dot
	Measured value	5 digits Sign: Minus sign on most significant digit
	Unit	Selectable from t, kg, g, N, lb, none
Status display	NET/GROSS / HOLD / STAB / ZT / ZALM / NZ / HH*1 / HI*1*3 / GO*1 / LO*1*3 / LL*1 / SP1*2*3 / SP2*2*3 / SP3*2*3 / COMPLETE*2*3 / OVER*2 / UNDER*2	
	*1 Display at HI/LO limit comparison mode	
	*2 Display at Final discharge-Over/Under comparison mode	
*3 Display at Final discharge-HI/LO limit comparison mode		
External signal	External output signal (9)	
	- At HI/LO limit comparison mode	HH / HI / GO / LO / LL / NZ / ERR / STAB
	- At Final discharge mode	SP1 / SP2 / SP3 / COMPLETE / OVER/HI / UNDER/LO / NZ / ERR / STAB
	Transistor open collector output. (Emitter = COM terminal)	
	The output turns to LOW when the transistor turns ON.	V <sub>ceo</sub> = 30 V (max), I <sub>c</sub> = 50 mA (max)
Interface	External input signal (11)	
	D/Z / TARE ON / TARE OFF / HOLD or JUDGE / Feed/Discharge / Gross / Net switching / CODE select / KEY LOCK / START / STOP	
	ON when shorted with COM terminals by contact (relay, switch, etc.) or non-contact (transistor, TTL open-collector output, etc.)	I <sub>c</sub> = 10 mA or lower
	Interface	SIF: 2-wire type serial interface
	232: RS-232C communication interface	
General specifications	CCL: CC-Link interface (Option)	
	ODN: DeviceNet interface (Option)	
	BCO: BCD parallel data output interface (Option)	
	DAV: D/A converter voltage output (Option)	
	DAI: D/A converter current output (Option)	
	Only 1 option can be installed	
	Power supply voltage	AC 100 to 240 V (+10%~15%) (Free power source 50/60 Hz)
	DC 24 V (±15%) (For DC, please specify when ordering)	
	Power consumption	4 W typ
	Operating conditions	Operation temperature: -10 to +40°C
Storage temperature: -20 to +60°C		
Humidity: 80% RH or less (non-condensing)		
External dimension	96(W) × 96(H) × 138(D) mm (Not including projections)	
Weight	Approx 1.0 kg	
Attachments	AC input cord* (Nominal rating 125 V) 3 m	1
	Jumper wire	2
	FCN series I/O connector (with cover)	1
	Operation manual	1
	Analog I/O connector terminal block (Already mounted on the main unit)	1
	Mini driver (when D/A converter option is selected)	1
	BCD output connector (when BCD output option is selected)	1
	DeviceNet connector (when DeviceNet option is selected)	1
	CC-Link connector (when CC-Link option is selected)	1
	* To be attached only for AC specifications.	
Optional accessories	CA372-I/O:	Cable with FCN connector at one-end 3 m
	CA600-BCDCNV:	FCN connector 32p-57-36p catbrye cable 0.3 m
	CA81-232X:	miniDIN-D-Sub9p cross cable 1.5 m
	CAAC2P-B3:	AC input cord 3 m (Same as the attachment)
	CAAC3P-B3:	AC input cord 3 m
	CA325AC3P-B3:	AC input cord 3 m
	CAAC3P-CEE7/7-B2:	AC input cord (Voltage resistance: 250 V) 2 m
	CAA325AC3P-CEE7/7-B2:	AC input cord (Voltage resistance: 250 V) 2 m
	CN50:	FCN series I/O connector (with cover) (Same as the attachment)
	CN51:	BCD output connector
CN55:	FCN series I/O connector (with diagonal cover)	
CN60:	Circular DIN8p connector for RS-232C	
CN71:	CC-Link connector	
CN72:	Double row connector for CC-Link	
CN80:	Analog I/O connector terminal block (Same as the attachment)	
CND01:	DeviceNet connector	
DTC2-PSL:	Case for F600AT	
GMP96×96:	Rubber packing	
TSU03:	Lightning surge protector	
CE marking certification	EN61326-1 (Only for DC specification)	

\* Please note that there are possibilities of individual differences in a color tone on display devices such as LEDs, fluorescent display tubes and LCDs due to manufacturing process or production lots.

### Structure of product code



#### ① Standard unit

Sign	Power supply
Standard	AC 100 to 240 V (Free)
DC (CE)	DC 24 V

#### ③ Interface

Sign	Interface
Standard	SIF, RS-232C
↓ One optional interface can be added in addition to the standard interface.	
CCL	CC-Link
ODN	DeviceNet
BCO	BCD output (Sink type)
DAV	D/A converter (Voltage)
DAI	D/A converter (Current)