

# PW25P SINGLE POINT TYPE LOAD CELL FOR HYGIENE STANDARDS



A waterproof & High-pressure washable load cell.  
Sanitary design, very rugged and easy to clean, suitable for use in food industry


## CE IP69K Detachable cable

### Specifications

Model	PW25P-10KG	PW25P-20KG
Rated capacity	10 kg	20 kg
Rated output	2.0±0.2 mV/V	
Limit load at 20 mm eccentricity	1000% R.C.	
Service load at max. 120 mm eccentricity	150% R.C.	
Maximum safe side overload	200% R.C.	
Zero balance	0±0.1 mV/V	
Non-linearity	0.0166% R.O. typ.	
Hysteresis	0.0166% R.O. typ.	
Compensated temperature range	-10 to +40°C	
Safe temperature range	-10 to +50°C	
Temperature effect on zero	0.0140% R.O./10°C	
Temperature effect on span	0.0175% R.O./10°C (+20 to +40°C) 0.0117% R.O./10°C (-10 to +20°C)	
Input resistance	300 to 500 Ω	
Output resistance	300 to 500 Ω	
Recommended excitation voltage	1 to 12 V	
Insulation resistance	1000 MΩ or more	
Degrees of protection	IP68, IP69K *	
Load cell material	Stainless steel	
Deflection at rated	0.19 mm	0.18 mm
Natural frequency	210 Hz	315 Hz
Maximum platform size	400×400 mm	
Weight	0.8 kg	
Cleaning temperature	Up to 120°C in 10 minutes	


\* IP69K: water at high pressure, steam cleaner (Based on DIN 40050, part 9 specifications, for road vehicles.)

### Application example

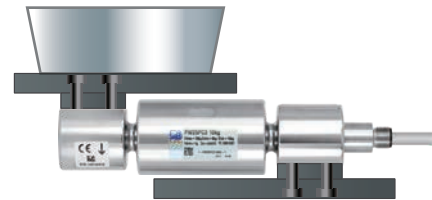


Ideal for weighing a small food bucket

### Wiring diagram

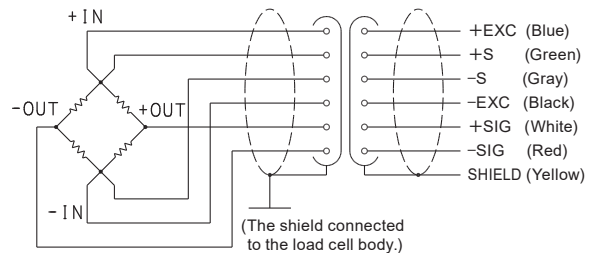

### External dimension

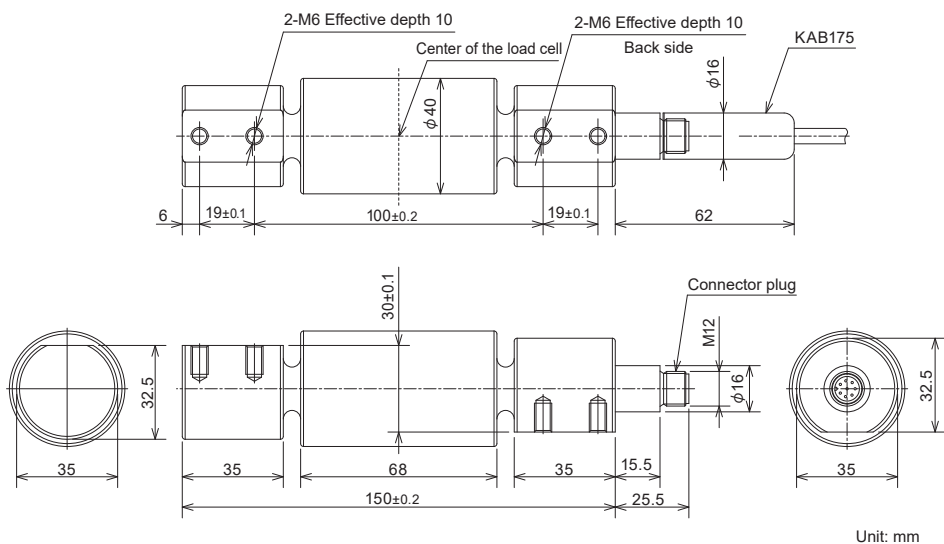

### Optional accessories

#### ■ KAB175-3



φ5.2 6-conductor hygiene design cable 3 m  
Cable end: 7 wires

Unit: mm