

UTM II ROTATING TORQUE METER



Compact design suitable for installation in equipment — Slip-ring-less rotating torque meter achieving high accuracy, high stability & high stiffness, simultaneously

Rotating torque meter, UTM II, designed with Unipulse's improved unique torque sensing technology! Suitable for installing in small confined space of machines which was not possible in the past.

- Available in 17 different capacities ranging from 0.05 to 10000 N m.
- Cut-off frequency of 1 kHz with high-speed sampling at 6 kHz.
- Safe overload of 500%
- Power supply DC 24 V
- No external amplification required: ± 5 V analog output voltage
- A rotational pulse generating circuit (4 pulses/revolution) is built in as standard.
- Improved noise immunity by adopting an insulated power supply

Compact and easy to install

The six models (0.05, 0.1, 0.2, 0.5, 1, 2 N m) are particularly compact and light: 54(W) \times 50(H) \times 40(D) mm in size, 200 g or less in weight.

Maintenance-free

No slip-ring.
The lifetime of UTM II is mainly determined by the lifetime of bearings.

Maximum rotational speed 25000 rpm

0.05 to 10 N m	25000 rpm
20, 50 N m	20000 rpm
100 N m	15000 rpm
200 N m	12000 rpm
500 N m	10000 rpm
1000 N m	7000 rpm
2000 N m	6000 rpm
5000 N m	5000 rpm
10000 N m	4000 rpm


High accuracy and stability

1/10000 torque resolution with outstanding zero stability. UTM II accurately measures tiny torque variations.

Small starting torque

The starting torque of the bearing in the UTM II-0.05Nm is only 0.00001 N m (0.03% FS).
Actually, the effect of rotating friction can be negligible.

Smart system configuration with no external circuits needed

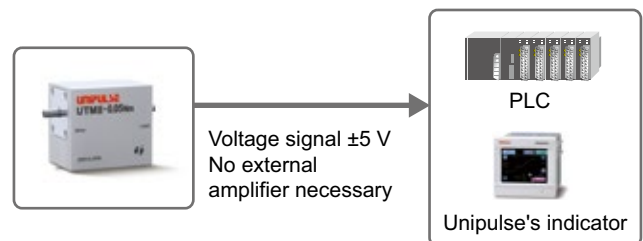

Full of measuring instruments dedicated for UTM II

TM320

High-speed sampling
Torque, rotation speed, and power are displayed simultaneously.
More details: P.27

TM380

High-speed sampling
Torque, rotation speed, and angle are displayed simultaneously.
More details: P.28

TC80

High-speed sampling
Torque, rotation speed, and torque-angle curve can be monitored.
More details: P.29

TM301

Torque, rotation speed, and power are displayed simultaneously.
More details: P.30

TM400

High-speed sampling
Torque, rotation speed, and torque-angle curve can be monitored.
More details: P.31

TM700

High-speed sampling
Monitoring of torque, rotation speed, and power curves.
More details: P.32

TM500

Waveform display of torque variation against angles.
More details: P.33


TM201

Torque, rotation speed, and power are monitored and saved on PC.
More details: P.34

Specifications

Measurement range	±0.05 N m	±0.1 N m	±0.2 N m	±0.5 N m	±1 N m	±2 N m	±5 N m	±10 N m	±20 N m	±50 N m	±100 N m	±200 N m	±500 N m	±1000 N m	±2000 N m	±5000 N m	±10000 N m										
Power supply	DC 24 V±15%																										
Consumption current	100 mA or less							150 mA or less					160 mA or less														
Output range	±5 V Load resistance must be more than 2 kΩ																										
Responsivity	1 kHz																										
Rotation signal	4 pulses per 1 rotation Open collector Max. ratings 30 V DC, 10 mA																										
Safe overload	500% FS																										
Non-linearity	0.03% FS or less																										
Hysteresis	0.03% FS or less																										
Repeatability	0.03% FS or less																										
Operation temperature	-10 to +50°C																										
Temperature effect on zero	0.01% FS/°C or below																										
Temperature effect on span	0.01% FS/°C or below																										
Maximum rotation speed	25000 rpm																										
Torsional spring constant (N m/rad)	5.67	11.57	26.10	93.1	188	414	691	1851	5386	8428	17.3×10 ³	41.7×10 ³	117×10 ³	377×10 ³	717×10 ³	1649×10 ³	3255×10 ³										
Maximum torsional angle (rad)	8.81×10 ⁻³ (0.505°)	8.64×10 ⁻³ (0.495°)	7.66×10 ⁻³ (0.439°)	5.37×10 ⁻³ (0.308°)	5.32×10 ⁻³ (0.305°)	4.83×10 ⁻³ (0.277°)	7.24×10 ⁻³ (0.415°)	5.40×10 ⁻³ (0.310°)	3.71×10 ⁻³ (0.213°)	5.93×10 ⁻³ (0.340°)	5.78×10 ⁻³ (0.331°)	4.79×10 ⁻³ (0.275°)	4.28×10 ⁻³ (0.246°)	2.65×10 ⁻³ (0.152°)	2.79×10 ⁻³ (0.160°)	3.03×10 ⁻³ (0.174°)	3.07×10 ⁻³ (0.176°)										
Inertia moment (kg m ²)	8.77×10 ⁻⁷	8.87×10 ⁻⁷	8.99×10 ⁻⁷	1.49×10 ⁻⁶	1.52×10 ⁻⁶	1.42×10 ⁻⁶	3.56×10 ⁻⁶	3.66×10 ⁻⁶	2.60×10 ⁻⁵	2.67×10 ⁻⁵	6.60×10 ⁻⁵	1.40×10 ⁻⁴	4.70×10 ⁻⁴	2.90×10 ⁻³	5.89×10 ⁻³	2.01×10 ⁻²	5.16×10 ⁻²										
Dimension (case size) W×H×D (mm)	54×50×40						57×55×40			70×68×51		67×74×57		67×79×62		67×79×72		86×103×98		86×119×111		97×141×137		103×166×162			
Total length	74 mm			84 mm			97 mm			150 mm		170 mm		177 mm		187 mm		217 mm		286 mm		306 mm		387 mm		447 mm	
Shaft diameter	φ 5 mm			φ 8 mm			φ 12 mm			φ 20 mm		φ 25 mm		φ 30 mm		φ 40 mm		φ 60 mm		φ 70 mm		φ 90 mm		φ 110 mm			
Approx. weight	160 g			180 g			270 g			700 g		1.1 kg		1.5 kg		2.6 kg		7.3 kg		11 kg		21 kg		36 kg			
Supplied cable	6-conductor flexible cable (2 m) Cable end: 7 wires → Cable length is switchable to 5 m (Option: UTM II-L5)																										
Optionally available cable	CATM51: 6-conductor flexible cable (5 m) Cable end: 7 wires CATM12: 6-conductor flexible cable (10 m) Cable end: 7 wires																										
Option	Rotary encoder	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○									
	Key groove								○	○	○	○	○	○	○	○	○	○									
	Key groove& Rotary encoder								○	○	○	○															
	Square drive													○													
	Square drive& Rotary encoder									○	○	○	○	○	○	○	○	○									
CE marking certification	2011/65/EU+EU/2015/863, 2014/30/EU(EN61326-1, EN61326-2-3)																										

External dimension

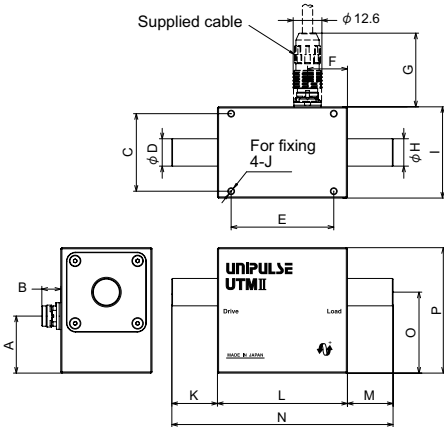


Measurement range	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P									
0.05 N m	25	8.3	32	5h7	45	18	32.3	5h7	40	M3 Depth 6	15	54	10	10	74	33	50								
0.1 N m																									
0.2 N m																									
0.5 N m																									
1 N m																									
2 N m	34	12h7	19.5	12h7																					
5 N m																									
10 N m	31.5	6.8	43	20h7	58	20.5	30.8	20h7	51	M4 Depth 8	70	40	150	42.5	68										
20 N m																									
50 N m																									
100 N m																									
200 N m																									
500 N m	25	5.3	64	40h7	52	28.5	29.3	40h7	72	M5 Depth 10	110	60	187	48	79										
1000 N m																									
2000 N m																									
5000 N m																									
10000 N m																									
	4.8	124	90h7	72	28.8	90h7	137	110h7	162	M6 Depth 12	145	97	145	387	72.5	141									
	144	110h7	76	36.5				28.8									110h7	162	M8 Depth 16	172	103	172	447	85	166

* For the dimensions of options, please refer to the page for each option.

Unit: mm

Supplied cable Flexible cable

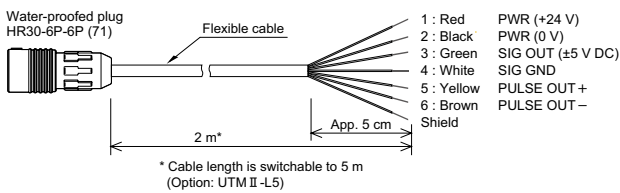


* Cable length is switchable to 5 m (Option: UTM II-L5)

Cautions for use

Possibility of overload during setup

When installing the sensor with one side of the shaft fixed, overload may occur due to unintended torque. Please pay extra attention to low capacity model.



Protection against water and condensation

Do not let water enter the shafts. Do not use the sensor in an environment where the main unit gets condensed.




Alter the shape of shafts

Do not alter the shape of shafts under any circumstances (Will affect accuracy). Shafts of UTM III/UTM II have sensing function.




Overload due to resonance vibration

If sensor is used with vibrating devices, please be advised that torque may overload due to resonance.



UTM II- 0.05Nm (R) (K) (W)

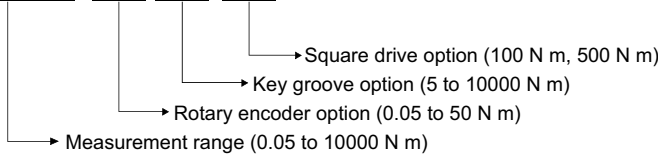

* You can add both rotary encoder and key groove options to 5 N m, 10 N m, 20 N m and 50 N m capacity type. Model numbers are UTM II -ONm(RK) respectively.

* You can add both rotary encoder and square drive options to 10 N m, 20 N m, 50 N m, 100 N m and 500 N m capacity type. Model numbers are UTM II -ONm(WR) respectively.


(R) Rotary encoder option: 0.05 to 50 N m




- Optical encoder
- Suitable for measurement of torque against angular variation

● Installation

Fix the main unit loosely to prevent angular error induced by rotation of the main unit.


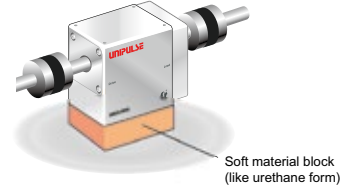


- Torque signal (analog ±5 V) and rotation angle signals (A, B and Z open collector outputs) are outputted.

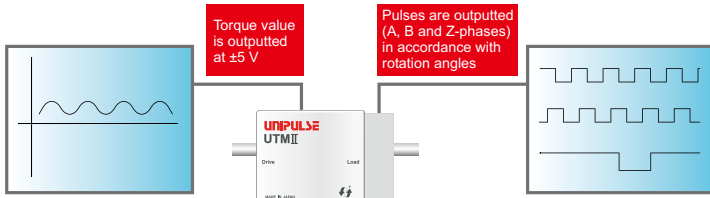

Measurement range	Pulses per rev.	Maximum measurable rotation speed	Torsional spring constant (N m/rad)	Maximum torsional angle (rad)	Inertia moment (kg m ²)	Approx. weight
0.05 N m	2000	4500 rpm	5.55	9.01×10 ⁻³ (0.516°)	1.39×10 ⁻⁶	200 g
0.1 N m			11.08	9.02×10 ⁻³ (0.517°)	1.40×10 ⁻⁶	
0.2 N m			23.73	8.43×10 ⁻³ (0.483°)	1.41×10 ⁻⁶	
0.5 N m			88.32	5.66×10 ⁻³ (0.324°)	1.90×10 ⁻⁶	220 g
1 N m			169.41	5.90×10 ⁻³ (0.338°)	1.93×10 ⁻⁶	
2 N m			333.57	6.00×10 ⁻³ (0.344°)	1.83×10 ⁻⁶	
5 N m	1440	2000 rpm	831	6.02×10 ⁻³ (0.345°)	4.20×10 ⁻⁶	330 g
10 N m			1492	6.70×10 ⁻³ (0.384°)	4.30×10 ⁻⁶	
20 N m			4390	4.56×10 ⁻³ (0.261°)	0.30×10 ⁻⁴	
50 N m			7578	6.60×10 ⁻³ (0.378°)	0.311×10 ⁻⁴	

■ UTM II-0.05Nm(R) to 50Nm(R)

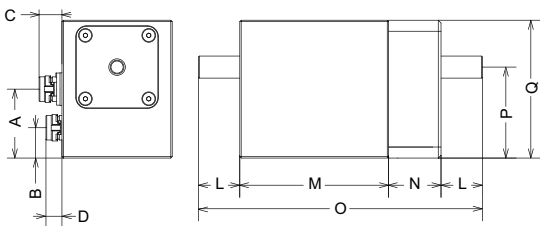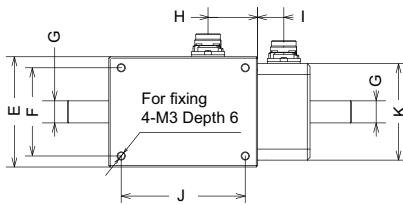


Measurement range	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
0.05 N m	25	11	8.3	5.8	40	32	φ 5h7	18	9.5	45	35	54	19	103	93	33	50
0.1 N m																	
0.2 N m																	
0.5 N m																	
1 N m																	
2 N m																	
5 N m	13.5	6.8	34	φ 12h7	19.5	37	20	57	116	35.5	55						
10 N m																	
20 N m																	
50 N m	31.5	13	6.8	8.5	51	43	φ 20h7	20.5	7	58	51	40/50	70	17	167/187	42.5	68

Unit: mm

■ Rotary encoder attached cable

Water-proofed plug HR30-6P-6S (71)




* Cable length is switchable to 5 m (Option: UTM II-R5)


(K) Key groove option: 5 to 10000 N m

■ UTM II-5Nm(K) to 10000Nm(K)

• Key (Included in (K) option)



• Key groove



Measurement range	A	B	C	D	E	F	G	H
5 N m	4 ^{+0.03} _{-0.03}	4h9 ^{+0.03} _{-0.03}	14 ^{+0.03} _{-0.03}	4 ^{-0.012} _{-0.042}	2	14 ^{+0.03} _{+0.1}	2.5 ^{+0.1} ₋₀	—
10 N m	6 ^{+0.03} _{-0.03}	6h9 ^{+0.03} _{-0.03}	32 ^{+0.025} _{-0.043}	6 ^{-0.012} _{-0.042}	3	32 ^{+0.03} _{+0.1}	3.5 ^{+0.1} ₋₀	M3
20 N m								
50 N m								
100 N m	7 ^{+0.036} _{-0.036}	8h9 ^{+0.036} _{-0.036}	48 ^{+0.025} _{-0.025}	8 ^{-0.015} _{-0.051}	4	48 ^{+0.03} _{+0.1}	4 ^{+0.2} ₋₀	M5
200 N m								
500 N m	11 ^{+0.011} _{-0.011}	12h9 ^{+0.011} _{-0.043}	62 ^{+0.025} _{-0.025}	12 ^{-0.018} _{-0.061}	4	62 ^{+0.03} _{+0.1}	5 ^{+0.2} ₋₀	M5
1000 N m								
2000 N m								
5000 N m	12 ^{+0.011} _{-0.011}	20h9 ^{+0.011} _{-0.052}	100 ^{+0.025} _{-0.025}	20 ^{-0.022} _{-0.074}	5	100 ^{+0.03} _{+0.1}	7.5 ^{+0.2} ₋₀	M8
10000 N m								
5000 N m	14 ^{+0.011} _{-0.011}	25h9 ^{+0.011} _{-0.052}	135 ^{+0.025} _{-0.025}	25 ^{-0.022} _{-0.074}	5	135 ^{+0.03} _{+0.1}	9 ^{+0.2} ₋₀	M10
10000 N m								

* During high-speed rotation, consider the imbalance caused by the key and adjust the rotation balance of the entire device.

Unit: mm



Drive (Nut runner)

Load (Socket)



Specifications

Contactless torque detection enables stable measurement without missing data.

- It is ideal to monitor torque of nut runners (fastening tools)
- With the high accuracy and high-speed response of UTM II torque fluctuation can be monitored while tightening nuts.*

Torque: UTM II (W)

Torque + Angle: UTM II (WR)

* Note: Please do not use it with impact wrenches.



- Torque can be easily checked by simply inserting and tightening it between the nut runners output shaft and socket.

■ UTM II (W)


Model	UTM II-100Nm(W)	UTM II-500Nm(W)
Measurement range	±100 N m	±500 N m
Power supply	DC 24 V±15	
Power consumption	150 mA or less	
Output range	±5 V Load resistance must be more than 2 kΩ	
Responsivity	1 kHz	
Rotation signal	4 pulses per 1 rotation	
Safe overload	150% FS	
Non-linearity	0.03% FS or less	
Hysteresis	0.03% FS or less	
Repeatability	0.03% FS or less	
Operation temperature	-10 to +50°C	
Temperature effect on zero	0.01% FS/°C or below	
Temperature effect on span	0.01% FS/°C or below	
Maximum rotation speed	15000 rpm	10000 rpm
Torsional spring constant	38.5×10 ³ N m/rad	265×10 ³ N m/rad
Maximum torsional angle	2.60×10 ⁻³ rad (0.149°)	1.88×10 ⁻³ rad (0.108°)
Inertia moment	3.8×10 ⁻⁵ kg m ²	2.15×10 ⁻⁴ kg m ²
Case size	67(W) × 74(H) × 57(D) mm	67(W) × 79(H) × 72(D) mm
Total length	100.5 mm	115 mm
Shaft diameter	□12.7 mm	□19.05 mm
Weight	Approx. 730 g	Approx. 1.4 kg
CE marking certification	2011/65/EU+(EU)2015/863, 2014/30/EU/EN61326-1, EN61326-2-3	

■ UTM II (WR)


Model	UTM II-10Nm(WR)-6.35	UTM II-20Nm(WR)-6.35	UTM II-50Nm(WR)-9.53	UTM II-100Nm(WR)-12.7	UTM II-100Nm(WR)-19.05	UTM II-500Nm(WR)-19.05
Measurement range	±10 N m	±20 N m	±50 N m	±100 N m	±100 N m	±500 N m
Power supply	DC 24 V ±15%					
Power consumption	100 mA or less			150 mA or less		
Output range	±5 V Load resistance must be more than 2 kΩ					
Responsivity	1 kHz					
Rotation signal	4 pulses per 1 rotation					
Angle of rotation (encoder) output	Open collector Max. ratings 30 V, 10 mA					
Safe overload	150% FS					
Non-linearity	0.03% FS or less					
Hysteresis	0.03% FS or less					
Repeatability	0.03% FS or less					
Operation temperature	-10 to +50°C					
Temperature effect on zero	0.01% FS/°C or below					
Temperature effect on span	0.01% FS/°C or below					
Maximum rotation speed (Measurable range for angle)	10000 rpm (800 rpm)					
Torsional spring constant	2.15×10 ³ N m/rad	17.6×10 ³ N m/rad	26.4×10 ³ N m/rad	54.6×10 ³ N m/rad	136×10 ³ N m/rad	136×10 ³ N m/rad
Maximum torsional angle	4.64×10 ⁻³ rad (0.266°)	9.29×10 ⁻³ rad (0.532°)	2.84×10 ⁻³ rad (0.163°)	3.78×10 ⁻³ rad (0.217°)	1.83×10 ⁻³ rad (0.105°)	3.68×10 ⁻³ rad (0.211°)
Inertia moment	4.0×10 ⁻⁶ kg m ²	3.33×10 ⁻⁵ kg m ²	3.58×10 ⁻⁵ kg m ²	1.92×10 ⁻⁴ kg m ²	2.06×10 ⁻⁴ kg m ²	2.06×10 ⁻⁴ kg m ²
Case size	77(W) × 55(H) × 40(D) mm		87(W) × 74(H) × 57(D) mm		87(W) × 79(H) × 72(D) mm	
Total length	96.5 mm		112 mm		133 mm	
Shaft diameter	□6.35 mm		□9.53 mm		□12.7 mm	
Weight	Approx. 310 g		Approx. 840 g		Approx. 860 g	
CE marking certification	2011/65/EU+(EU)2015/863, 2014/30/EU/EN61326-1, EN61326-2-3					

External dimension

■ UTM II -100Nm/500Nm(W)

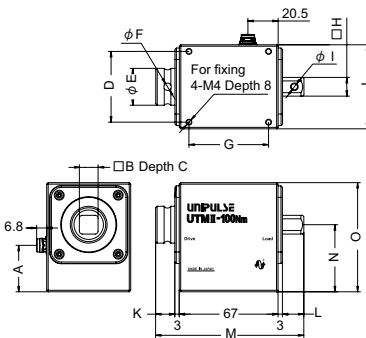

■ UTM II -10Nm/20Nm/50Nm/100Nm/500Nm(WR)

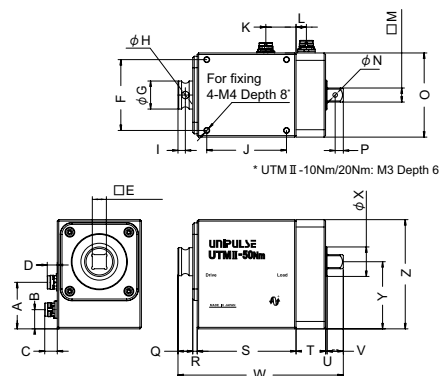

Measurement range	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
UTM II -100Nm(W)	31.5	12.7 ^{+0.03}	18	48	25	5	54	12.7 ^{±0.15}	4.2	57	13	14.5	100.5	45.5	74
UTM II -500Nm(W)	21.5	19.05 ^{+0.08}	27	64	38	6	52	19.05 ^{±0.13}	6	72	19	23	115	43	79

Unit: mm

Measurement range	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	
UTM II -10Nm(WR)-6.35	25	12.9	8.5	8.5	6.35 ^{+0.08}	Depth 8.5	34	12	2.1	4	45	17.5	7	6.35 ^{±0.09}	2.1	40	3.5	10	1	57	20	1	7.5	96.5	12	35.5	55
UTM II -20Nm(WR)-6.35	31.5	13	8.5	6.8	9.53 ^{+0.08}	Depth 12	48	19	5	5	54	20.5	7	9.53 ^{±0.09}	3.1	57	5.5	10	3	67	20	1	11	112	20	45.5	74
UTM II -50Nm(WR)-12.7	31.5	13	8.5	6.8	12.7 ^{+0.1}	Depth 18	48	25	5	8	54	20.5	7	12.7 ^{±0.15}	4.2	57	6.5	13	3	67	20	1	14.5	118.5	20	45.5	74
UTM II -100Nm(WR)-19.05	25	21.5	6.8	8.5	19.05 ^{+0.08}	Depth 27	64	38	6	10.2	52	20.5	9	19.05 ^{±0.13}	6	72	10.3	19	3	67	20	1	23	133	28	43	79
UTM II -500Nm(WR)-19.05	21.5	25	8.5	6.8	19.05 ^{+0.08}	Depth 27	64	38	6	10.2	52	20.5	9	19.05 ^{±0.13}	6	72	10.3	19	3	67	20	1	23	133	28	43	79